


VIVREAU Top 50/85

Versatility meets reliability.




Medium or high capacity versions



Easy Access Panel additional control device (can be optionally installed and flexibly positioned)

The BRITA HygienePlus solution (which combines an inlet filter, thermal disinfection, and a bacterial filter) provides effective protection for dispensers. Developed on the basis of over 20 years' experience in the healthcare market, it is designed for environments where hygiene is of the utmost importance, and is optionally available for BRITA VIVREAU Top 50/85.

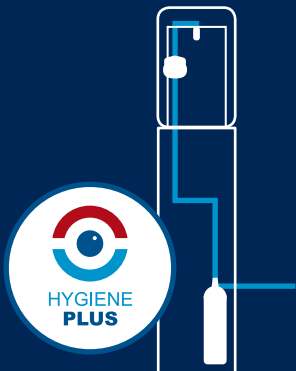

• **Intuitive display and choice of buttons:** choice of touch or mechanical buttons to select water type

• **ThermalGate™** powerful thermal-disinfection feature supplied as standard

• **High-quality materials** stainless steel

• **Focus on sustainability** R290 natural refrigerant and extremely low power consumption

Ideal for e.g.


- Staff rooms
- Reception areas
- Lobbies
- Meeting rooms
- Gyms and fitness zones

Benefits

- Unlimited unchilled still or chilled still, sparkling or semi-sparkling water
- BRITA's ThermalGate™ feature protects against retrograde contamination from external sources
- Capacity: 50 l/h or 85 l/h


Two installation options

- Countertop
- Floorstanding



VIVREAU Top 50/85

Technical data



Model	BRITA VIVREAU Top 50	BRITA VIVREAU Top 85	Base cabinet (optional)	Easy Access Panel (optional)
Design / Type	Countertop	Countertop		
Types of water				
Unchilled still	•	•		•
Chilled still	•	•		•
Semi-sparkling	•	•		•
Sparkling	•	•		•
Configuration options				
Hygiene feature: ThermalGate™		standard		
Hygiene feature: BRITA HygienePlus		optional		
Dispensing buttons: Touch		standard		
Dispensing buttons: Mechanical		optional		
Waste water container (installation without waste water connection)		optional		
Specifications				
Cooling capacity	50 l/h	85 l/h		
Unit dimensions (W x H x D)	278 x 530 x 518 mm		278 x 1430 x 518 mm	flat: 80 x 80 x 116 mm angled: 80 x 80 x 137 mm
Dispensing height	330 mm			
Weight	35 kg	40 kg	7 kg	
Max. power consumption	440 W	540 W		
Max. flow rate	2 l/min			
Product number				
System with ThermalGate™ (touch display)	VIV T 50 C2-TG-I-CU	VIV T 85 C2-TG-I-CU	1033790 (Base cabinet) 1038480 (BC base plate)	1040230 (Easy Access Panel)
System with BRITA HygienePlus (touch display)	VIV T 50 C2-HP-I-CU	VIV T 85 C2-HP-I-CU		
System with ThermalGate™ (mechanical buttons)	VIV T 50 M-C2-TG-J CU	VIV T 85 M-C2-TG-J CU		
System with BRITA HygienePlus (mechanical buttons)	VIV T 50 M-C2-HP-J CU	VIV T 85 M-C2-HP-J CU		
Waste water container	1041216 VIV Waste Water Container-SP			

The food-grade quality and safety of BRITA water filter products are tested and verified by independent institutions



*applies to all materials that come into contact with water